

Dear Valued Customer,

Thank you again for choosing a Generac Home Standby Generator to deliver peace of mind and give you the security of knowing that if your power ever goes out, you and your family are protected.

When you first purchased your generator, we notified you that due to ongoing global shortage and inconsistent supply of microprocessor chips, your generator was shipped without the module that enables it to connect to your WiFi network and communicate to the **Mobile Link Remote Monitoring app**.

Enclosed in this package, you will find the WiFi accessory and simple do-it-yourself instructions on how to install and connect to your home network. Additionally, we've included instructions to help you monitor your generator with the Mobile Link Remote Monitoring app.

Thank you again for your purchase and trust in the Generac brand. Please contact Generac directly at **855-436-8439** or visit **[www.generac.com/wifikitinstall](http://www.generac.com/wifikitinstall)** if you have any questions regarding the WiFi module shipment and homeowner installation.

Generac Power Systems, Inc

Scan this QR code  
to watch the easy  
installation video



EN: [www.generac.com/wifikitinstall](http://www.generac.com/wifikitinstall)  
FR: [www.generac.com/wifikitinstall-fr](http://www.generac.com/wifikitinstall-fr)

**GENERAC®**




# WiFi Module

## EASY INSTALLATION GUIDE


Français: [www.generac.com/wifikitinstall-fr](http://www.generac.com/wifikitinstall-fr)




**QUESTIONS?** Call 855-436-8439 or visit [www.generac.com/wifikitinstall](http://www.generac.com/wifikitinstall)

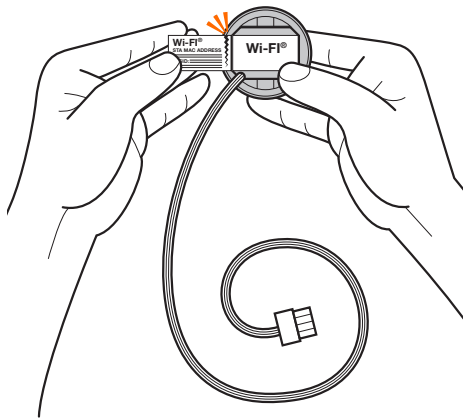


**1.** Remove the identification tag on your new WiFi Module. **IMPORTANT: DO NOT LOSE THIS TAG.** You will need this later to create your Mobile Link account.

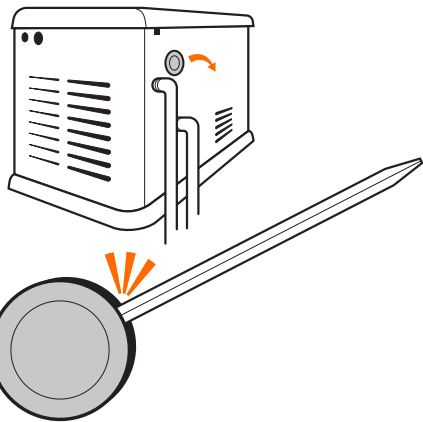

**2.** Locate and remove the gray plug on the back of your Home Standby Generator. If you have trouble, use the supplied wedge to loosen.

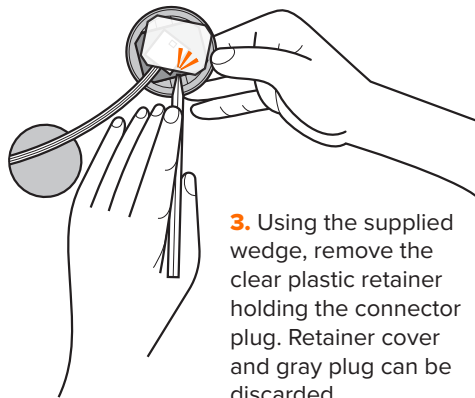

**3.** Using the supplied wedge, remove the clear plastic retainer holding the connector plug. Retainer cover and gray plug can be discarded.

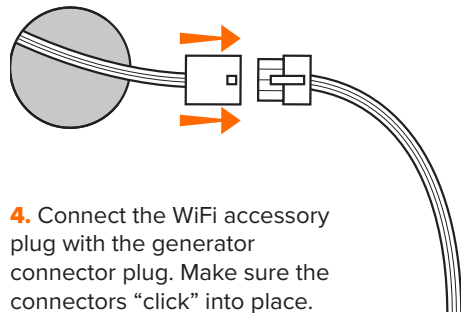

**4.** Connect the WiFi accessory plug with the generator connector plug. Make sure the connectors “click” into place.



**5.** Locate the “TOP” of WiFi accessory. With top facing upward, gently replace wiring into generator opening and push the WiFi module into place until the two tabs “click”.

